

Jet - Undersink

Similar in performance to the Jet countertop, the under counter system does a great job of producing large quantities of sparkling, ambient and cold water while remaining out of sight leaving countertop space free.



The Jet Undersink Chiller simplifies the provision of drinking water giving a practical solution to hydrating environments such as offices, professional studios, small catering facilities etc. The Jet Undersink Chiller is reliable, practical and can be a quick means to providing a refreshing hydration service to a group of individuals

Key features

- Ice Bank Cooling System
- Leakage Safety Valve
- Filter & Co2 Front Compartment
- Electronic Control (optional)
- Drip Tray (optional)
- Cu= Safepath Biofilm Prevention
- Taps (optional)



Product details

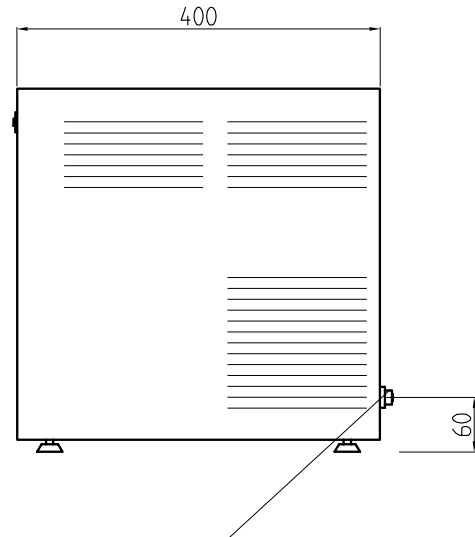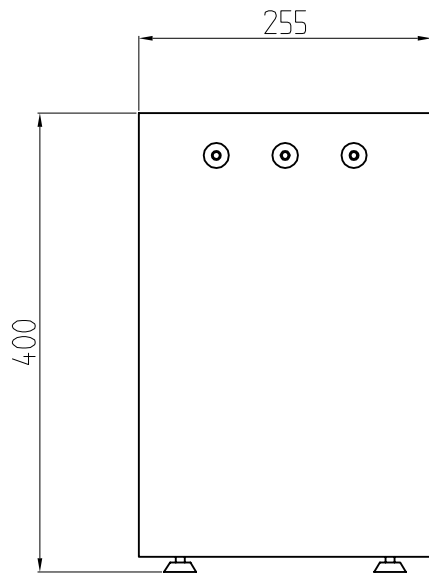

Water inlet Ø8mm o 1/4F

Water options	Technical features	
Cold & ambient 	Types available	Undersink
Cold, ambient & sparkling 	Colour	Metal Skinplate
	Weight	Cold & ambient 30L: 21KG Cold, ambient & Sparkling 30L: 26KG Cold & ambient 45L: 22KG Cold, ambient & sparkling 45L: 27KG
	Capacity	30L 45L

Installation requirements

The unit must be connected to a potable water supply, with a minimum water pressure of 2.5 bar.

Tested and Certified



Waterlogic International Limited and WLI Trading Limited reserves the right, in order to reflect continuous research and development, to amend or change specifications without prior notice. Waterlogic and the Waterlogic logo, Firewall and the Firewall logo are trademarks in countries where the Group operates. WLI Trading Ltd is licensed to use BioCote, and BioCote logo which are registered trademarks of BioCote Ltd.